



EDD

NOTES:
1. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE $\pm .010"$ [.254mm].

CAD#83-3994TC_A

DRAWING NO.:
83-3994TC-*

REV.
A

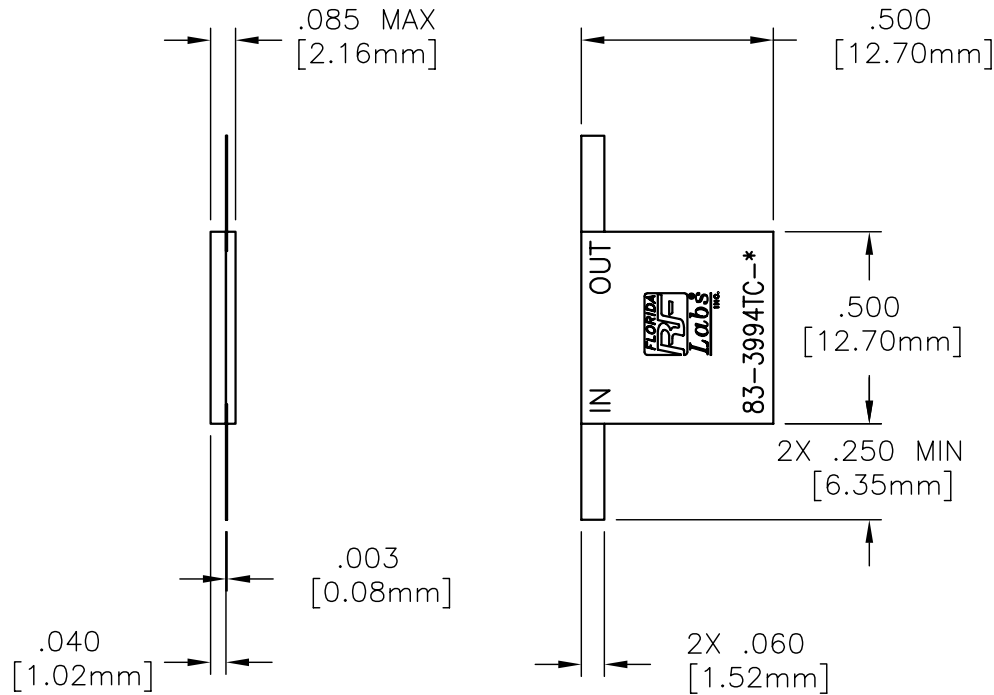

MATERIALS:


SUBSTRATE: BERYLLIUM OXIDE
COVER: ALUMINA
TAB: BERYLLIUM COPPER PER ASTM B194
RESISTIVE FILM: NICHROME

FINISH:

SOLDERABLE GROUND PLANE: TIN/LEAD OVER NICKEL
TAB: TIN/LEAD PER MIL-T-10727

ELECTRICAL: (ATTENUATOR)

NOMINAL IMPEDANCE: 50 OHMS
FREQUENCY RANGE: DC-1.0 GHz
VSWR (MAX): 1.25:1
INPUT POWER: 250 WATTS
ATTENUATION STABILITY: .0001 dB/dB/°C
ATTENUATION ACCURACY: 20 dB \pm 1.0 dB
30 dB \pm 1.5 dB
TEMPERATURE COEFFICIENT: \pm 200 PPM MAX
OPERATING TEMP.: -55° TO +150° (°C)

				EN# 04-F0164	APVD	DATE	REFERENCE		 8851 OLD KANSAS AVE. STUART, FL. 34997 772-286-9300		
				UNLESS OTHERWISE SPECIFIED 1. DO NOT SCALE DRAWING 2. DIMENSIONS ARE IN INCHES 3. DIMENSIONS ARE AFTER PLATING 4. CORNERS, EDGES AND FILLETS: R MAX 5. SURFACE ROUGHNESS: 6.3 6. REMOVE ALL BURRS			CATALOG			TITLE TAB & COVER, ATTENUATOR, 250 WATT	
				TOLERANCES .X \pm .XX \pm .XXX \pm ANGLES X° \pm X°			MATERIAL		FINISH -		
				THE INFORMATION CONTAINED HEREIN IS: (A) CONSIDERED PROPRIETARY TO FLORIDA RF LABS INC.; (B) PROTECTED BY COPYRIGHT OWNED BY FLORIDA RF LABS INC.; (C) CONSIDERED A "WORK FOR HIRE" UNDER COPYRIGHT LAW; (D) PROTECTED BY TRADE SECRET LAWS WHICH MAKE ILLEGAL THE MISAPPROPRIATION OF THIS INFORMATION; AND (E) IS TO BE USED SOLELY FOR THE PURPOSE WHICH IT IS SUPPLIED. THIS INFORMATION SHALL NOT BE DISCLOSED IN WHOLE OR IN PART, TO ANY PARTY, FOR ANY REASON WITHOUT THE EXPRESS WRITTEN CONSENT OF A QUALIFIED EXECUTIVE OF FLORIDA RF LABS INC.			SCALE	CAGE CODE ID NO.		SIZE	DRAWING NO.:
REV.	DESCRIPTION	DRAWN	APVD.				2/1	2Y194	A	83-3994TC-*	A
				MFG:		CHKD.:		DRAWN: JAD 04/29/04		SHEET OF	